




## Features


- Available for both dressing / changing with a single motor.
- Cylinder brake is attached on removal unit and used to enhance removal strength.
- Powered by compact 3-phase AC motor which has high power and high speed.
- Compact design for both ATD / ATC by mounting the motor vertically.
- Highest removable force among Kyokutoh products.

## System 1

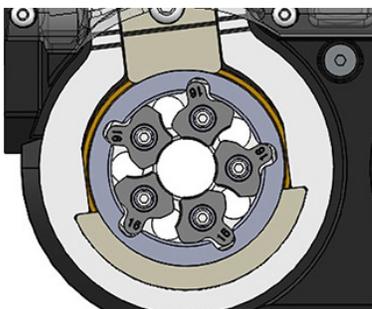

- Forward/Reverse rotating nails, shank adapter pullout prevention
- Strong removal torque

## System 2

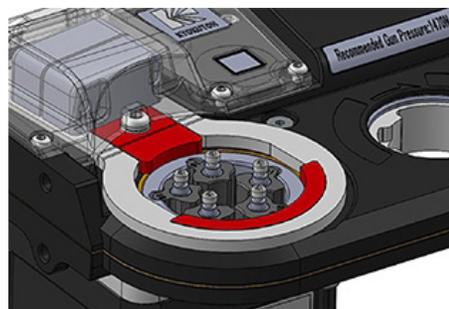

- Strong removal powered by cylinder brake
- Brake is made of durable material for long life and stable performance

## Cartridge




**XR**



**STC**

- Compatible with XR and STC magazines

## Specifications

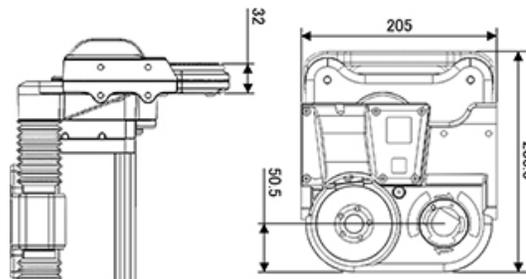

- Weight: 17.2 kg (without magazine)
- Rotation speed: 404rpm (Dress-side 200V 60Hz)

\*Magazine is optional \*\*This unit is only available in 220VAC